
TUNGSRAM

European Producer Lichting Solutions

Innovation is our heritage EST.1896





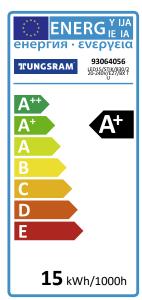

GE Bright Stik™ LED15/STIK/830/220-240V/E27/BX TU 93064056

Product information

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit . Replace a 40W, 60W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years*. That's a long time you can spend not worrying about light bulbs.

Application areas









GE Bright Stik™ LED15/STIK/830/220-240V/E27/BX TU 93064056

Product data

Product Code	93064056
Bulb Shape	T45
Bulb Finish	White
Bulb maximum overall diameter [mm]	45
Nominal Length [mm]	137.5
Net weight per piece [g]	70
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	E27

Performance data

Nominal/ Rated Beam Angle [°]	240
Weighted energy consumption [kWh/1000h]	15
Nominal Initial Lumens per Watt [lm/W]	101.4
Rated efficacy [lm/W]	101.4
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]] 3000	
Nominal lumens [lm]	1521
Colour Rendering Index (CRI) [Ra]	80


Electrical data

Nominal lamp power factor	>0.5
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Startup time [sec]	<0.5s
Power Factor	>0.5
Number of switching cycles	50000
Dimming Capability	No
Nominal lamp voltage range [V]	220-240V
Nominal power [W]	15

Logistic data

DUN Code	10064894574105
EAN Code	0064894574108
Pack Quantity	15
Inner pack type	Вох
Outer pack type	Carton
Product status	Available

Photometric Data

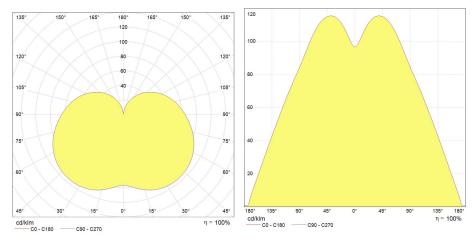



GE Bright Stik™ LED15/STIK/830/220-240V/E27/BX TU 93064056

Downloads & Links

Go to the catalog site (HTTP)

Photometry (IES)

Product range datasheet (PDF)

Images (HTTP)

Lighting design tools & calculators (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)