TUNGSRAM[™]

Innovation is our heritage EST. 1896



LED T8 15k hrs Start Glass (without starter) LED 8/T8SG 15k 0.6m/830/220-240V 93088826

Product information

The LED T8 Start Glass 15,000 hour range provides an attractive, entry-level alternative to standard Fluorescent T8 lamps. The innovative design delivers impressive light distribution and high efficiency, while at the same time ensuring rapid payback. Available in 60 and 120 cm lengths, the affordable LED T8 Start Glass brings the benefits of tubular LED lighting to a wider range of applications.

Application areas






) Hospitality

Industrial







TEUNGSRAM LED T8 15k hrs Start Glass (without starter) LED 8/T8SG 15k 0.6m/830/220-240V 93088826

Product data

Product Code	93088826
Bulb Shape	Т8
Bulb Finish	Diffuse
Bulb Diameter [mm]	28
Regulatory comment	CE certified
Nominal Length [mm]	600
Maximum Overall Length [mm]	604
Net weight per piece [g]	110
Gross weight per piece [g]	150
Operating position	Universal
Mercury Content [mg]	No
RoHS compliant	Yes
Brand	GE Lighting
Cap/Base	G13

Performance data

Nominal/ Rated Beam Angle [°]	200°
Colour Code	830
Colour consistency	<6 steps
Rated Lumens [lm]	750
Weighted energy consumption [kWh/1000h]	8
Rated efficacy [lm/W]	94
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]]	3000
Nominal lumens [lm]	750
Colour Rendering Index (CRI) [Ra]	80

TEUNGSRAM LED T8 15k hrs Start Glass (without starter) LED 8/T8SG 15k 0.6m/830/220-240V 93088826

Electrical data


Nominal lamp power factor	>0,5
Rated power [W]	8.0
Lamp Current [A]	76mA
Design Ambient Temperature [°C]	-20+40°C
Starting time (sec)	<0,5 sec
Number of switching cycles	30000
Dimming Capability	No
Nominal lamp voltage range [V]	220-240
Nominal power [W]	8

Logistic data

DUN Code	10064894599238
EAN Code	0064894599231
Pack Quantity	15
Inner pack type	sleeve
Outer pack type	Bx
Layer quantity EUR	120
Layer quantity UK	150
Pallet quantity EUR (PC)	1200
Pallet quantity UK (PC)	1500
Outer case size	635x155x105mm
Product status	Available

TEUNGSRAM^{**} LED T8 15k hrs Start Glass (without starter) LED 8/T8SG 15k 0.6m/830/220-240V 93088826

Photometric Data

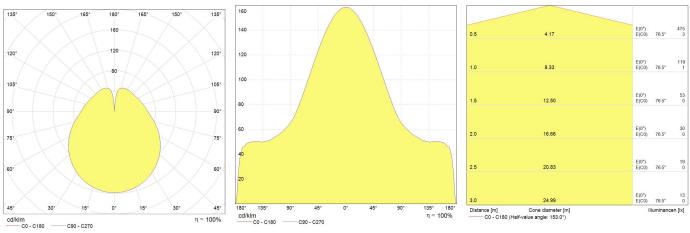

Downloads & Links

Go to the catalog site (HTTP) Photometry (IES) Product datasheet (PDF) Installation guide (PDF) Images (HTTP) Certificate for the Quality Management System of GE Lighting EMEA (PDF) Certificate for the Environmental Management System of GE Lighting EMEA (PDF)



Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.