



GE Lighting

The LED lamps cannot be changed in the luminaire

874/2012

This luminaire contains built-in LED lamps.

> L E D

(FE)

93066765 RSTA-D7-630-7SR-4



LED Recessed Spotlight **RSTA-D7-630-7SR-40 93066765**

Product information

GE Lighting introduces the new LED Recessed Spotlight fixture range. These LED Spotlights are ideal for small areas or when you are looking for directional lighting. These LED fixtures are designed to offer quick replacement option for standard halogen spots.

Application areas





🛆 Retail





Product data

| Mounting type | Recessed |
|-------------------------------|--|
| Dimensions | Ø 88 ±2 × 34.5±2mm |
| Energy efficiency class (EEC) | A+ |
| IP Rating | 20 |
| Certifications | CE |
| Weight [kg] | with driver: 0,17 ; without driver: 0,13 |
| DIALux description | GE - LED Recessed Spotlight - 550lm - 6W - 3000K - 80CRI - 93066765[SKU] - Recessed |
| Body colour | White |

Performance data

| Operating Voltage | 220-240V |
|---|--------------|
| Rated efficacy [lm/W] | 90 |
| Current [A] | 24-34mA |
| Total system power | 6 |
| Nominal lumens [lm] | 550 |
| Rated lumens [lm] | 550 |
| Rated power [W] | 6 |
| Rated life [h] | 30 000 / L70 |
| Nominal correlated colour temperature (CCT) [K] | 3000 |
| Colour rendering index (CRI) [Ra] | 80 |
| | |

Optical data

Nominal beam angle [°]

40





Electrical data


| Nominal lamp power factor | >0,9 |
|---------------------------|-------------------------|
| Class | Class II |
| Controllability | Constant Current Driver |

Logistic data

Product status

Available


Photometric Data

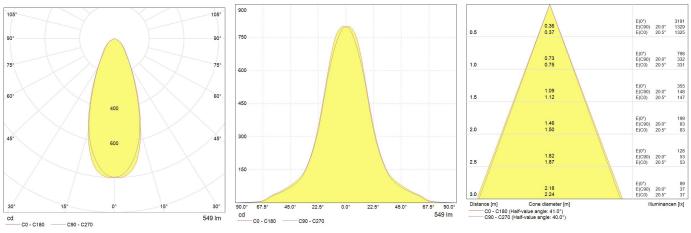





Technical drawing

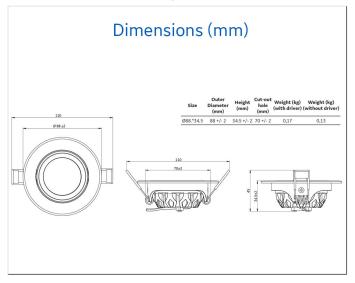

Downloads & Links

Go to the catalog site (HTTP)

LED Recessed Spotlight Datasheet (PDF)

LED Recessed Spotlight Images (HTTP)

Lighting design tools & calculators (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)